


Technical Data Sheet

BETA

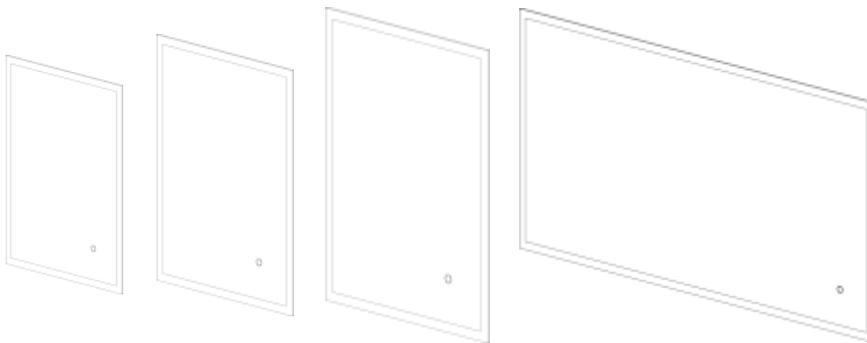

Box Contents:

Beta Mirror | 2x wall plugs | 2x screws | Instructions booklet

Materials

Frame Material: Extruded Aluminium

Glass: 5mm PVC Backed


FAQ's:

FAQ's:	Units	BTM045	BTM050	BTM060	BTM120
Why are the lights not switching on?	-	Please note: After the mirror is connected to power for the first time, it may take up to 5 minutes for the sensor to calibrate and become fully responsive.			
Can the mirror be hung landscape?	-	Yes	Yes	Yes	Yes
What is the thickness of the mirror glass?	mm	5			
Is the mirror IP44 rated?	-	Yes – Suitable for use in bathroom zone 2			
What size fuse should I use?	-	Seek the advice of an electrician			
What is the total power consumption?	W	33.5	38	48	76
Does the mirror have an energy rating?	-	Yes – It has an energy rating of: A			
What is the colour of the light and the Kelvin rating?	K	3000 - 6500			
What is the wattage of the lights?	W	21.5	25	29	39
Where is the IR sensor/rocker switch located?	-	Centre front middle			
Can the LED lighting be replaced?	-	No			
Can the touch sensor be replaced?	-	Yes			
What is the output of the demister pad?	W	12	13	19	37
What are the dimensions of the demister pad? (L x W)	mm	290 x 280	350 x 250	450 x 270	750 x 300
How do I turn on the demister pad?	-	The demister pad will turn on when the LEDs are turned on.			
Are illuminated mirrors supplied with mains cable?	-	All illuminated mirrors are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit.			


*Dimensions are subject to change, customers are advised to measure actual product before commencing installation.

**Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.


BTM045

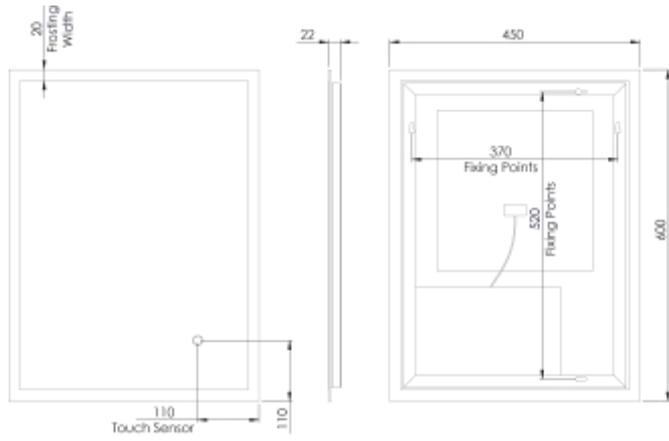

BTM050

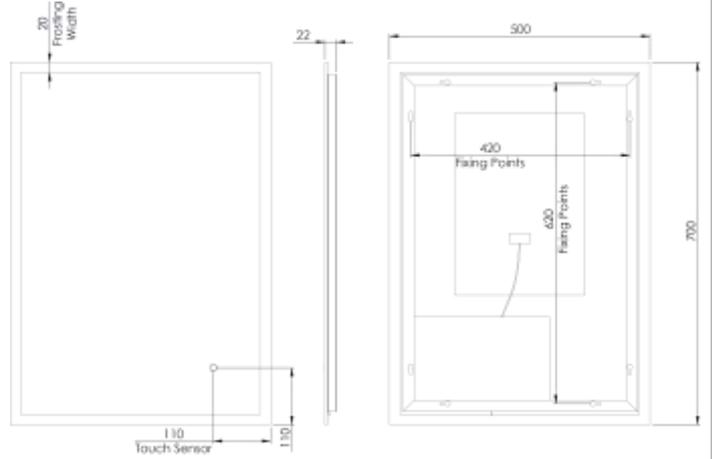

BTM060

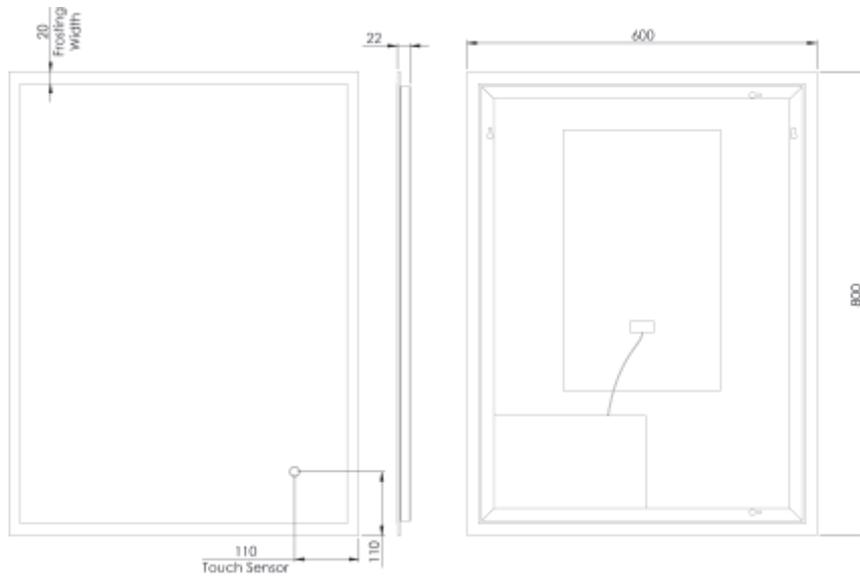

BTM120

